

### Levelogger® Edge

Model 3001

The Levelogger Edge records highly accurate groundwater and surface water level and temperature measurements. It combines a pressure sensor, temperature detector, 10-year lithium battery, and datalogger, sealed within a 7/8" x 6.25" (22 mm x 159 mm) stainless steel housing with Titanium based PVD coating.

The Levelogger Edge measures absolute pressure using a Hastelloy pressure sensor, offering excellent durability and reliability. Combined with the Titanium based PVD coating, both elements have high corrosion resistance in harsh environments, allowing stable readings in extreme pressure and temperature conditions. The Hastelloy sensor can withstand 2 times over-pressure without permanent damage.

The Levelogger Edge features a wide temperature compensated pressure range (0 to 50°C, -10 to 50°C for Barologger Edge), and rapid thermal response time. The Levelogger Edge has high resolution and an accuracy of 0.05% FS. The convenient Barologger Edge provides the easiest and most accurate method of barometric compensation.

### Applications

- Aquifer characterization: pumping tests, slug tests, etc.
- Watershed, drainage basin and recharge monitoring
- Stream gauging, lake and reservoir management
- Harbour and tidal fluctuation measurement
- Wetlands and stormwater run-off monitoring
- Water supply and tank level measurement
- Mine water and landfill leachate management
- Long-term water level monitoring in wells, surface water bodies and seawater environments



*Fast communication and downloading speeds with a high speed Optical Reader*



[Get Quote](#) | [More Info](#)

### Features

- 0.05% FS Accuracy
- Corrosion resistant Titanium based PVD coating
- Robust Hastelloy pressure sensor
- Accurate temperature compensation
- Memory for up to 120,000 readings
- Basic and advanced data compensation options

The Levelogger Edge has a battery life of 10 years based on a 1-minute sampling rate. It has FRAM memory for 40,000 sets of data points - or up to 120,000 using the compressed linear sampling option.

The Levelogger Edge uses a Faraday cage design, which protects against power surges or electrical spikes caused by lightning. Its durable maintenance-free design, high accuracy and stability, make the Levelogger Edge the most reliable instrument for long-term, continuous water level recording.

### Flexible Communication

Levelogger PC Software is streamlined, making it easy to program dataloggers, and to view and compensate data, in the office or in the field. The software has useful programming options, including compressed and repeat sampling, and future start/stop. Data compensation has been simplified, and allows multiple data files to be barometrically compensated at once.

The extremely intuitive Solinst Levelogger App, and Levelogger App Interface on your in-field Leveloggers, creates a Bluetooth® connection between your Leveloggers and smart device. Also an option, the DataGrabber is a field-ready, USB data transfer unit designed specifically for the Levelogger Series.

For remote monitoring, options include STS Telemetry Systems and RRL Remote Radio Link. In addition, Levelogger Edge Series dataloggers are SDI-12 compatible.

## Levelogger Setup

Programming Leveloggers is extremely intuitive. Simply connect to a PC using an Optical Reader or PC Interface Cable. All in one screen fill in your project information and sampling regime. Templates of settings can be saved for easy re-use.

The Levelogger time may be synchronized to the computer clock. There are options for immediate start or future start and stop times. The percentage battery life remaining and the amount of free memory are indicated on the settings screen.


Leveloggers can also be programmed with a sampling regime and start/stop times using the Solinst Levelogger App on your smart device.

## Convenient Sampling Options

Leveloggers can be programmed with linear, event-based, or a user-selectable sampling schedule. Linear sampling can be set from 1/8 second to 99 hours. The Levelogger Edge can be programmed with compressed linear sampling, which increases memory from 40,000 to up to 120,000 readings.

Event-based sampling can be set to record when the level changes by a selected threshold. Readings are checked at the selected time interval, but only recorded in memory if the condition has been met. A default reading is taken every 24 hours if no “event” occurs.

The Schedule option allows up to 30 schedule items, each with its own sampling rate and duration. For convenience, there is an option to automatically repeat the schedule.

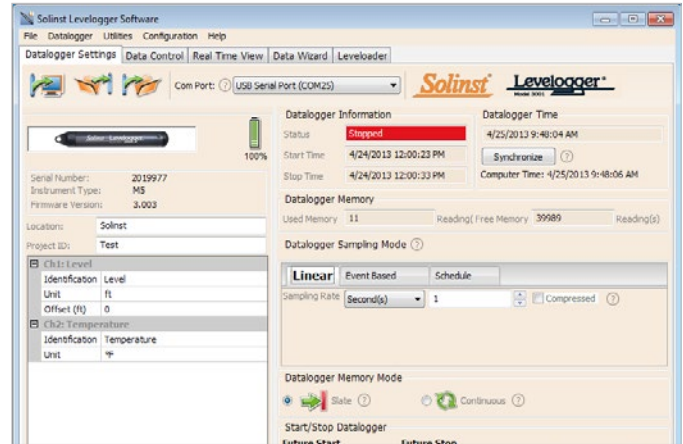

Levelogger Edge Settings Software Windows

## Data Download, Viewing and Export

Data is downloaded to a PC with the click of a screen icon. There are multiple options for downloading data, including ‘Append Data’ and ‘All Data’. The software also allows immediate viewing of the data in graph or table format using the ‘Real Time View’ tab.

The level data is automatically compensated for temperature, and the temperature data is also downloaded. Barometric compensation of Levelogger data is performed using the Data Wizard, which can also be used to input manual data adjustments, elevation, offsets, density, and adjust for Barometric efficiency.


The software allows easy export of the data into a spreadsheet or database for further processing.

The Solinst Levelogger App also allows you to view and save real-time, or logged data right on your smart device.

## Helpful Utilities

The ‘Self-Test Diagnostic Utility’ can be used in case of an unexpected problem. It checks the functioning of the program, calibration, backup and logging memories, the pressure transducer, temperature sensor and battery voltage, as well as enabling a complete Memory Dump, if required.

A firmware upgrade will be available from time to time, to allow upgrading of the Levelogger Edge, as new features are added.

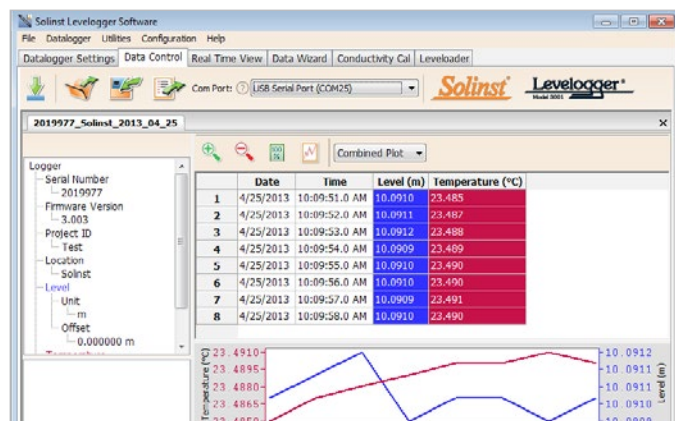

## Solinst Levelogger App & Levelogger App Interface

The Levelogger App Interface uses Bluetooth® technology to connect your Levelogger to your smart device. With the Solinst Levelogger App, you can download data, view real-time data, and program your Leveloggers. Data can be e-mailed from your smart device directly to your office (see Model 3001 Levelogger App & Interface data sheets).



®The Apple logo is a trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc. Google Play is a trademark of Google Inc. The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Solinst Canada Ltd. is under license.

## Standard Cable Deployment

Levelloggers may be suspended on a stainless steel wireline or Kevlar® cord. This is a very inexpensive method of deployment, and if in a well, allows the Levellogger to be easily locked out of sight and inaccessible. Solinst offers stainless steel wireline assemblies and Kevlar cord assemblies in a variety of lengths.

## Solinst 3001 Well Cap Assembly

The 2" Locking Well Caps are designed for both standard and Direct Read Cable deployment options.

The well cap has a convenient eyelet for suspending Levelloggers using wireline or Kevlar cord. The Well Cap insert has two openings to accommodate Direct Read Cables for both a Levellogger and Barologger. Adaptors are available to fit 4" wells.

The cap is vented to equalize atmospheric pressure in the well. It slips over the casing, and the cap can be secured using a lock with a 3/8" (9.5 mm) shackle diameter.



*Levellogger 2" Locking Well Cap Installations  
(see Well Caps data sheet for more details)*

## Direct Read Cables


When it is desired to get real-time data and communicate with Levelloggers without removal from the water, they can be deployed using Direct Read Cables. This allows viewing of the data, downloading and/or programming in the field using a portable computer, DataGrabber, or the Solinst Levellogger App and Interface.

Levelloggers can also be connected to an SDI-12 datalogger using the Solinst SDI-12 Interface Cable attached to a Direct Read Cable.

## Cable Specifications

Direct Read Cables are available for attachment to any Levellogger in lengths up to 1500 ft. The 1/8" dia. (3.175 mm) coaxial cable has an outer polyethylene (MDPE) jacket for strength and durability. The stranded stainless steel conductor gives non-stretch accuracy.

*Barologger and Levellogger  
installed in Well Using  
Direct Read Cables*

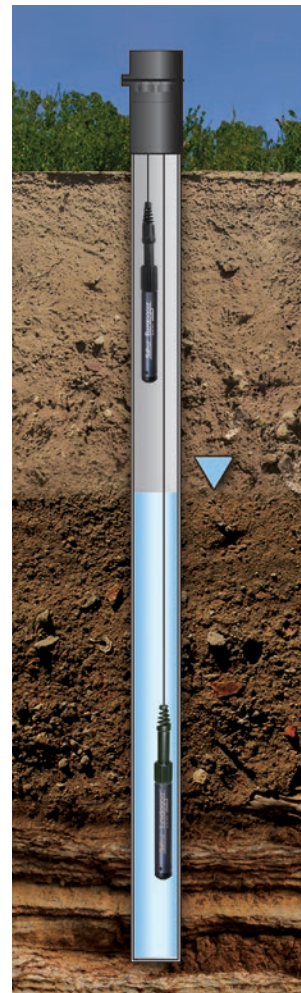

## Accurate Barometric Compensation

The Levellogger Edge measures absolute pressure (water pressure + atmospheric pressure) expressed in feet, meters, centimeters, psi, kPa, or bar.

The most accurate method of obtaining changes in water level is to compensate for atmospheric pressure fluctuations using a Barologger Edge, avoiding time lag in the compensation.

The Barologger is set above high water level in one location on site. One Barologger can be used to compensate all Levelloggers in a 20 mile (30 km) radius and/or with every 1000 ft. (300 m) change in elevation.

The Levellogger Software Data Compensation Wizard automatically produces compensated data files using the synchronized data files from the Barologger and Levelloggers on site.

The Barologger Edge uses pressure algorithms based on air rather than water pressure, giving superior accuracy.

The recorded barometric information can also be very useful to help determine barometric lag and/or barometric efficiency of the monitored aquifer.

The Barologger Edge records atmospheric pressure in psi, kPa, or mbar. When compensating submerged Levellogger Edge, Gold or Junior data, Levellogger Software Version 4 can recognize the type of Levellogger and compensate using the same units found in the submerged data file (Levellogger Gold and Junior measure in feet, meters, or centimeters). This makes the Barologger Edge backwards compatible.

*Synchronize & Streamline Your  
Barometric Compensation Efforts,  
Across Your Entire Site*



® Kevlar is a registered trademark of DuPont Corp.

## Levelogger Edge Specifications

|                            |  |
|----------------------------|--|
| <b>Level Sensor:</b>       | Piezoresistive Silicon with Hastelloy Sensor   |
| Accuracy:                  | ± 0.05% FS (Barologger Edge: ± 0.05 kPa)   |
| Stability of Readings:     | Superior, low noise  |
| Units of Measure:          | m, cm, ft., psi, kPa, bar, °C, °F<br>(Barologger Edge: psi, kPa, mbar, °C, °F)                           |
| Normalization:             | Automatic Temperature Compensation   |
| Temp. Comp. Range:         | 0° to 50°C (Barologger Edge: -10 to +50°C)   |
| <b>Temperature Sensor:</b> | Platinum Resistance Temperature Detector (RTD)   |
| Temp. Sensor Accuracy:     | ± 0.05°C   |
| Temp. Sensor Resolution:   | 0.003°C  |
| Battery Life:              | 10 Years - based on 1 reading/minute   |
| Clock Accuracy:            | ± 1 minute/year (-20°C to 80°C)  |
| Operating Temperature:     | -20°C to 80°C  |
| Maximum # Readings:        | 40,000 readings FRAM memory, or up to 120,000 using linear data compression                              |
| Memory:                    | Slate and Continuous   |
| Communication:             | Optical Infrared Interface. Conversion to RS-232, USB, SDI-12. Serial at 19,200 bps, 38,400 bps with USB |
| Size:                      | 7/8" x 6.25" (22 mm x 159 mm)  |
| Weight:                    | 4.6 oz. (129 grams)  |
| Corrosion Resistance:      | Titanium based PVD coating   |
| Other Wetted Materials:    | Delrin®, Viton®, 316L stainless steel, Hastelloy, Titanium based PVD coating                             |
| Sampling Modes:            | Linear, Event & User-Selectable with Repeat Mode, Future Start, Future Stop, Real-Time View              |
| Measurement Rates:         | 1/8 sec to 99 hrs  |
| Barometric Compensation:   | Software Wizard and one Barologger in local area (approx. 20 miles/30 km radius)                         |

| Models     | Full Scale (FS)  | Accuracy            |
|------------|------------------|---------------------|
| Barologger | Air only         | ± 0.05 kPa          |
| F15, M5    | 16.4 ft., 5 m    | ± 0.010 ft., 0.3 cm |
| F30, M10   | 32.8 ft., 10 m   | ± 0.016 ft., 0.5 cm |
| F65, M20   | 65.6 ft., 20 m   | ± 0.032 ft., 1 cm   |
| F100, M30  | 98.4 ft., 30 m   | ± 0.064 ft., 1.5 cm |
| F300, M100 | 328.1 ft., 100 m | ± 0.164 ft., 5 cm   |
| F600, M200 | 656.2 ft., 200 m | ± 0.328 ft., 10 cm  |

**Levelogger Junior Edge:** See Levelogger Junior Edge Data Sheet.  
**Conductivity:** See LTC Levelogger Junior Data Sheet  
**Vented Water Level Datalogger:** See 3500 AquaVent™ Data Sheet.

## DataGrabber™

The DataGrabber is a field-ready data transfer device that allows you to copy data from a Levelogger, onto a USB flash drive key.

The DataGrabber is compact and very easy to transport. It connects to the top end of a Levelogger's Direct Read Cable, or an Adaptor is available to allow direct connection to a Levelogger.



One push-button is used to download all of the data in a Levelogger's memory to a USB device plugged into the DataGrabber. A convenient LED light indicates the operation of the DataGrabber. The data in the Levelogger memory is not erased, and logging is not interrupted if the Levelogger is still running. The DataGrabber uses its own replaceable 9V battery.



## STS Telemetry

The STS Telemetry System provides an economical and efficient method to send Levelogger data from the field to your desktop. Built for Leveloggers, the system combines high quality dataloggers, intuitive software, and wireless communication, to create a remote monitoring solution.

Communication options give the flexibility to suit any project. Systems are suitable for both small to large networks. STS Systems are designed to save costs by enabling the self-management of data. Alarm notification, remote firmware upgrades and diagnostic reporting make system maintenance simple (see Model 9100/9200 data sheet).

## RRL Telemetry

The inexpensive RRL Remote Radio Link is ideal for short range applications up to 20 miles or 30 km; distances can be increased by using some radios as relay stations. Ideal for creating closed-loop monitoring networks using Leveloggers (see Model 9100/9200 data sheet).

® Delrin and Viton are registered trademarks of DuPont Corp.

™ AquaVent and DataGrabber are trademarks of Solinst Canada Ltd.